

- 316 L chrome body and chrome spot frame
- Polycarbonate luminaire glass
- Plastic injection mounting box
- Underwater connector
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC500F	WW-NW-CW	12-24V DC	2	150	0,25
AC500F	RGB	7,5V DC	8	-	0,25

**Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color.

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM

O Lens Options



XN: Extra Narrow Angle N: Narrow Angle W: Wide Angle

Mounting




Order Code

P . W . C . S . O




Product Diagrams

Polar Diagram

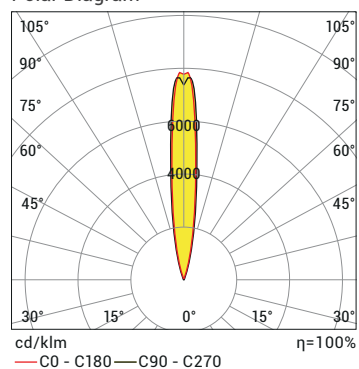



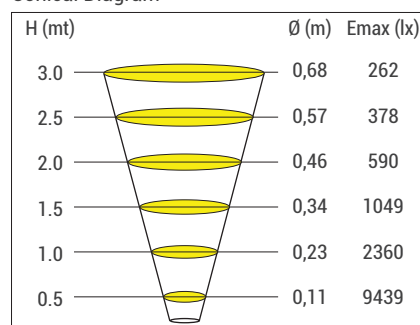



Conical Diagram



AC500F CW 10D 3W 12-24V DC IP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 	•			•	•	
R,G,B,A 	•			•	•	
RGB 	•					
RGBA/W 						
RGB DMX 			•			
WHITE DMX 			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC500F	5	PWM	2x	-	-
	7,5	PWM	-	4x	-
	12-24	ON/OFF	2x	-	-