

- Electrostatic powder coated aluminum injection housing
- UV protective polycarbonate body
- Suitable for pendant mounting

P W Product & Power Options


Product Name Led Quantity (qty/m)	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
Beehive	WW-NW-CW	220-240V AC	12	900	4,3
Beehive	WW-NW-CW	220-240V AC	17	1.275	4,3

*Power and Lumen values provided are based off of a "cold white (CW) LED".


C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

O Lens Options

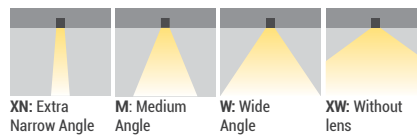

U Upper Piece Options




Order Code

P . W . C . O . U




Product Diagrams

Polar Diagram

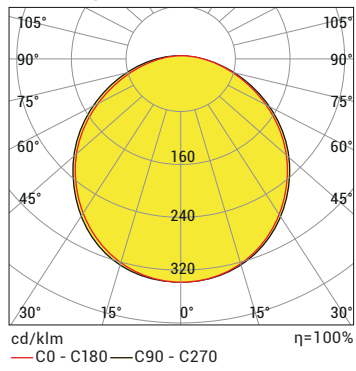

Conical Diagram

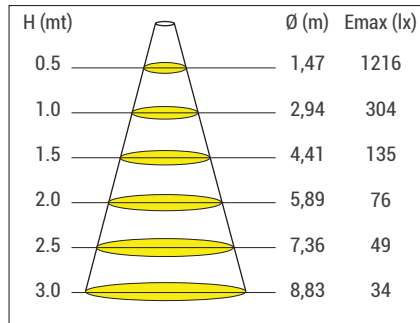

BEEHIVE 9 CW 12W 220V AC IP20

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Lotus Mall, Russia