

- Electrostatic painted aluminum injection body and frame
- Low-glare (UGR <19) homogeneous light
- Stainless spring system for ceiling mounting
- Suitable for recessed mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxB) (mm)	Cutting Dimensions (C) (mm)	Weight (kg)
CDEW3-TECO	WW-NW-CW	220-240V AC	7	550	Ø95x45	Ø78	0,3
CDEW4-TECO	WW-NW-CW	220-240V AC	16	1.360	Ø120x49	Ø102	0,4
CDEW6-TECO	WW-NW-CW	220-240V AC	20	1.750	Ø177x55	Ø152	0,6
CDEW8-TECO	WW-NW-CW	220-240V AC	25	2.250	Ø228x58	Ø200	0,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

G Housing Color Options



RAL9005 RAL9007 RAL9016




Order Code

P . W . C . S . G



Product Diagrams

Polar Diagram

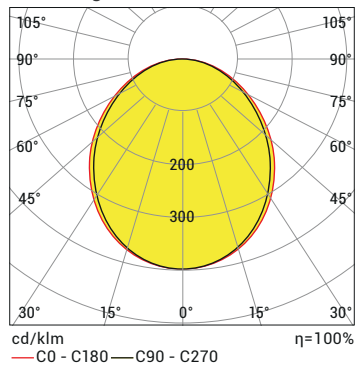

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0,5	1,25	2156
1,0	2,50	540
1,5	3,74	240
2,0	4,99	135
2,5	6,24	86
3,0	7,49	60

CDEW4-TECO NW40 16W 220VAC IP44

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

