

- Aluminum extrusion housing
- PC top cover
- High efficiency PMMA lens
- Stainless spring for ceiling mounting
- Recessed mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Cutting Dimensions (mm)	Weight (kg)
CDLG 2x2	WW-NW-CW	220-240V AC	10	950	Ø90x90	0,3

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm	● RGB
● NW: Natural White	4000K	● G: Green	525nm	● RGBW
● CW: Cold White	6500K	● B: Blue	465nm	● RGBA
		● A: Amber	590nm	

*Different colors are optional

O Lens Options




N: Narrow Angle M: Medium Angle W: Wide Angle




Order Code

P . W . C . O



Product Diagrams

Polar Diagram

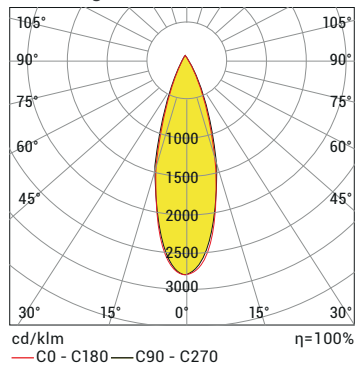







Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0,5	0,28	5346
1,0	0,57	1336
1,5	0,85	594
2,0	1,14	334
2,5	1,42	214
3,0	1,71	148

CDLG 1X4 CW 10W 40D 220VAC IP20

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	•
R,G,B,A 						
RGB 						
RGBA/W 						
RGB DMX 			•			
WHITE DMX 			•			

