

- Plastic injection rear housing
- Satin nickel coated plastic injection front frame
- Polycarbonate diffused front cover.

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDMS	WW-NW-CW	24V DC	2	130	0,4

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

U Upper Cover Options




33: Gloss Chrome 34: Matte Chrome

Control System Options


Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	●			●	●	●
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

Product Diagrams

Polar Diagram

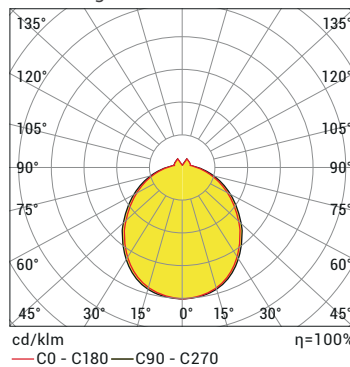

Conical Diagram

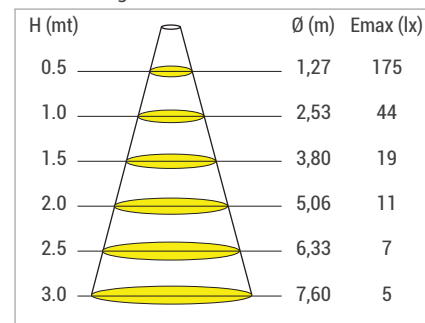

CDMS CW 120D 1.5W 24V DC IP20



Order Code

P . W . C . U

