

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors.
- Metal end cap
- Polycarbonate front cover with UV protection
- Cooling capacity up to 70 W/m
- Suitable for as pendant and surface mounting
- Standard rope size 150cm

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Fixture Model	Length (L) (mm)	Weight (kg)
EPL50-120	WW-NW-CW	220-240V AC	15	1.350	Direct	1217	3,5
EPL50-120	WW-NW-CW	220-240V AC	30	2.700	Direct	1217	3,5
EPL50-120	WW-NW-CW	220-240V AC	45	4.050	Direct + Indirect	1217	3,6
EPL50-160	WW-NW-CW	220-240V AC	25	2.250	Direct	1617	4,1
EPL50-160	WW-NW-CW	220-240V AC	42	3.780	Direct	1617	4,1
EPL50-160	WW-NW-CW	220-240V AC	63	5.670	Direct + Indirect	1617	4,2

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional.

S Driver Options


- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

G Housing Color/Coating Options




01: Anodized RAL9005 RAL9016 29: Walnut 30: Dark Walnut 31: Oak 32: Light Walnut

E Additional Pieces Options

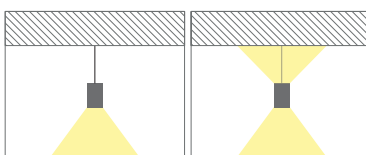

06: Direct 07: Direct / Indirect

M Mounting Options

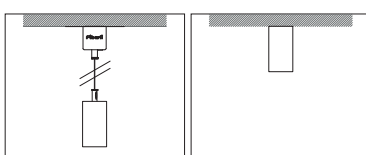


24: Pendant 25: Surface Mount




Order Code

P . W . C . S . G . E . M



Product Diagrams

Polar Diagram

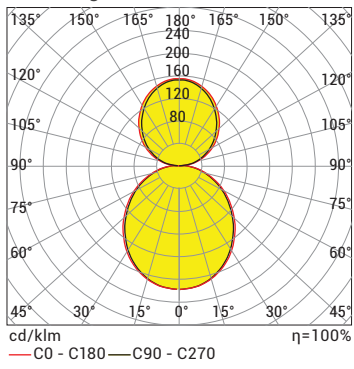

Conical Diagram

H (mt)	∅ (m)	E _{max} (lx)
0.5	1.40	1397
1.0	2.80	349
1.5	4.21	155
2.0	5.61	87
2.5	7.01	56
3.0	8.41	39

EPL50 DIRECT INDIRECT CW 42W 220V AC IP44D

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 	•			•	•	
R,G,B,A 						
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 						

