

- Electrostatic powder coated aluminum injection housing
- Ultra elliptical 3,8°x116° lens
- Integrated mechanism adjustable up to 7.0 degrees
- Internal drive
- Used on specially designed inclined windows
- Linear lighting effect

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CD-IZ	WW-NW-CW	220-240V AC	5	400	0,5

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K
● A: Amber	590nm

G Housing Color Options


RAL9005	RAL9007	RAL9016



Order Code

P . W . C . G



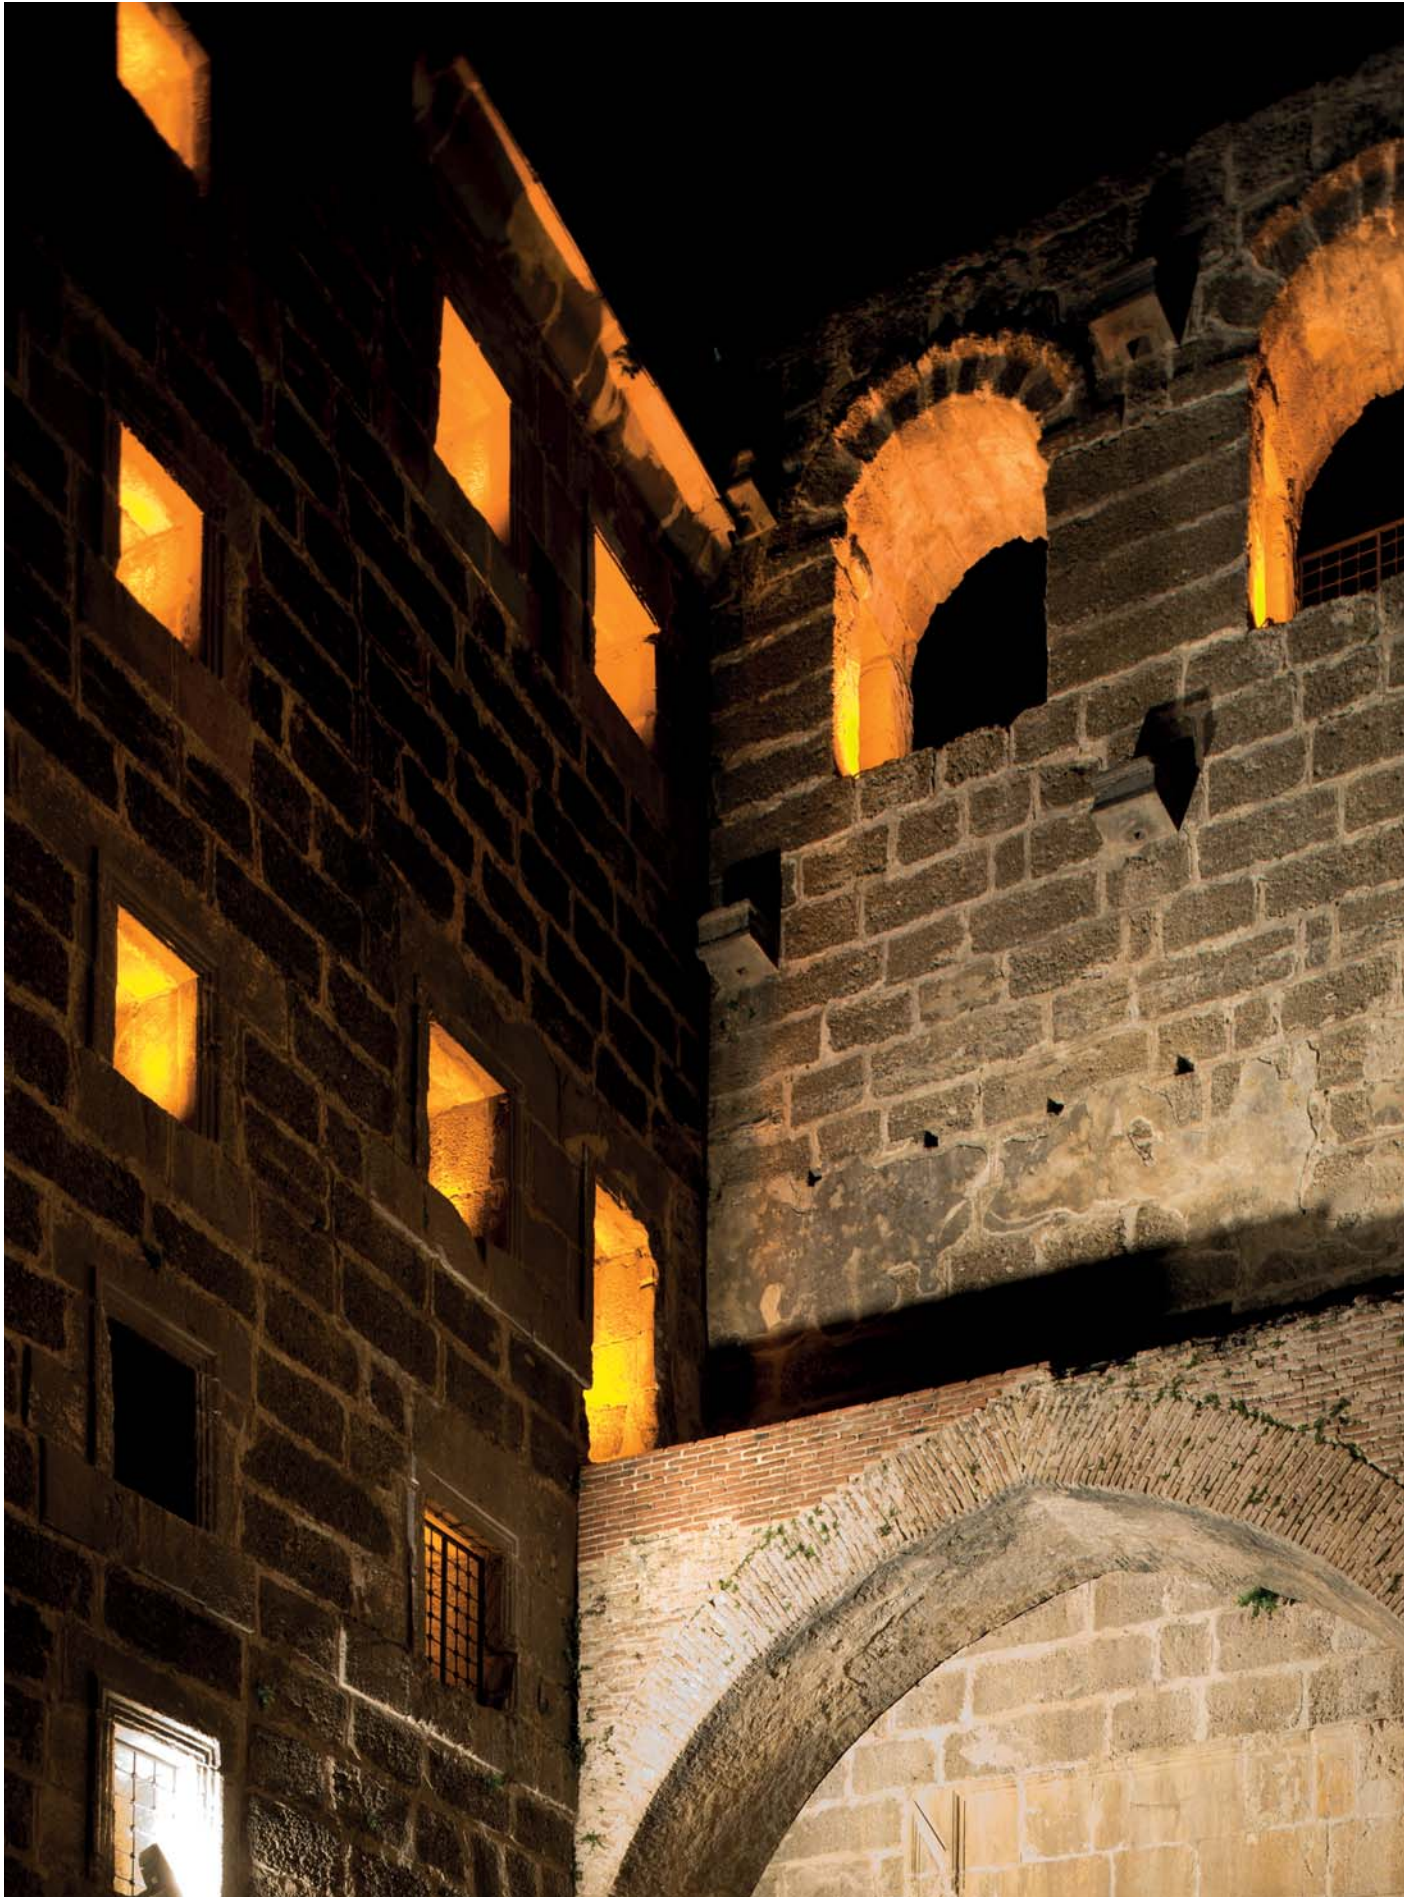

Aspendos Theatre, Antalya