

- Electrostatic powder coated aluminum body
- Tempered glass
- Stainless connectors
- One-way or two-way light output with different beam angle possibility

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Height (h) (mm)	Weight (kg)
SSA150-SINGLE	WW-NW-CW	220-240V AC	13	1.590	200	2,6
SSA150-DOUBLE	WW-NW-CW	220-240V AC	26	3.120	200	2,9
SSA150-DOUBLE	WW-NW-CW	220-240V AC	26	3.120	275	2,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



XN*: Extra Narrow Angle
 N: Narrow Angle
 M: Medium Angle
 W: Wide Angle

Lower and upper direction light angles can be selected separately.
 *Suitable for h:275 versiyon only

G Housing Color Options




RAL9005 RAL9007 RAL9016




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

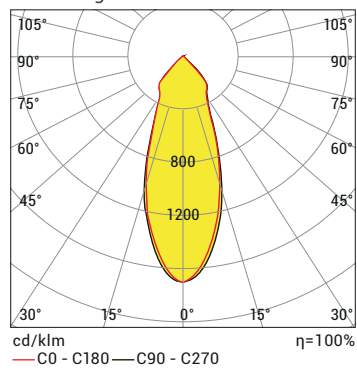






Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
0.5	0.35	11862
1.0	0.69	2965
1.5	1.04	1318
2.0	1.39	741
2.5	1.73	474
3.0	2.08	329

SSA150-SINGLE WW30 40D 13W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	
R,G,B,A 				•	•	
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 