

- High performance, delivers up to 60.000lm
- Electrostatic powder coated aluminum injection housing
- High efficient thermal design
- 5mm tempered glass
- Electrostatic painted DKP mounting feet
- Stainless fittings and clips
- +60°/-60° tilt angle
- Secure connection with IP67 socket

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
SUPREME-I	WW-NW-CW	220-240V AC	440	58.655	17,2

*Power and Lumen values provided are based off of a "natural white (NW) LED".


C Light Color Options

- WW: Warm White 3000K
- NW: Natural White 4000K
- CW: Cold White 6500K

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options

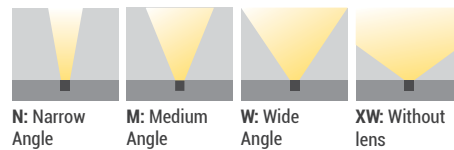

G Housing Color Options




Order Code

P . W . C . S . O . G




Product Diagrams

Polar Diagram

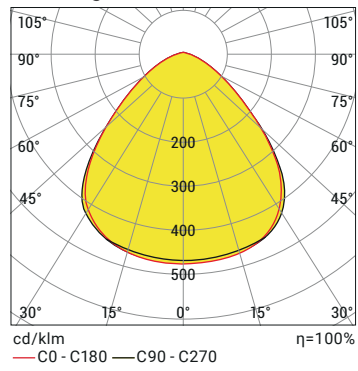

Conical Diagram

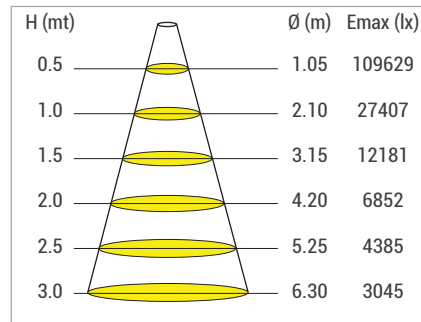

SUPREME-I NW40 90D 440W 220VAC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW ● ● ●				●	●	