

- Electrostatic powder coated aluminum injection body and spigot
- 4mm tempered glass
- Aluminum injection side covers
- Stainless connectors
- Electrostatic powder coated connection pipe
- 10 kV surge protection

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
SWH16	WW-NW-CW	220-240V AC	100	13.500	7,6
SWH16	WW-NW-CW	220-240V AC	120	15.600	7,6
SWH16	WW-NW-CW	220-240V AC	150	19.200	7,6
SWH16	WW-NW-CW	220-240V AC	200	25.000	7,6

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



XW: Without lens M3: 90°x120°

G Housing Color Options




RAL9005 RAL9007 RAL9016




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

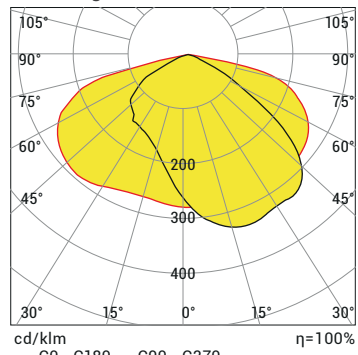

SWH16 CW 200W 90x120 D 220V AC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

