

- Anodized aluminum extruded profile
- Polycarbonate luminaire glass
- PVC side covers with invisible gland outlet and UV protection
- Stainless steel fixture stand
- High efficiency group lens
- IP68 air vent

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)	Weight (kg)
WLG2-30	WW-NW-CW	220-240V AC	10	1.012	345	0,94
WLG2-60	WW-NW-CW	220-240V AC	20	2.072	635	1,43
WLG2-90	WW-NW-CW	220-240V AC	28	3.056	930	2,02
WLG2-120	WW-NW-CW	220-240V AC	36	4.081	1220	2,46

\*Power and Lumen values provided are based off of a "cold white (CW) LED".

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K
● A: Amber	590nm

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver

## O Lens Options



N: Narrow Angle    M: Medium Angle    E: Elliptical Angle

## J Junction Options




01: Cable    02: IP Socket



Order Code


P . W . C . S . O . J . K . M





Sepetçiler Pavilion, İstanbul

## K Cable Direction Options

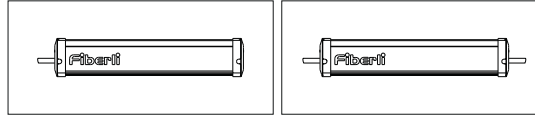


01: Single entry

03: Dual entry and exit \*

\*The max. junction qty may vary for the products with both entry and exit

## M Mounting Options


### Stand connector

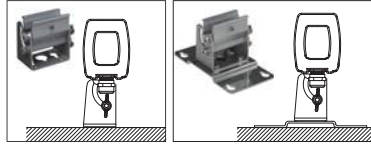

20: Standard Stand

21: Standard stand/  
Mounting kit

### Optional Accessories



34: Extension piece A=5cm

35: Extension piece A=10cm

36: Extension piece A=20cm

Extension pieces at any desired length are optional

### Connecting fittings



### Additional Pieces Options



Dual assembly



Ternary assembly



Quaternary assembly